


Features

- 20V/50A,
 $R_{DS(ON)} = 7m\Omega$ (typ.) @ $V_{GS} = 10V$
 $R_{DS(ON)} = 9m\Omega$ (typ.) @ $V_{GS} = 4.5V$
 $R_{DS(ON)} = 12m\Omega$ (typ.) @ $V_{GS} = 2.5V$
- Reliable and Rugged
- Lead Free and Green Devices Available (RoHS Compliant)


Applications

- Power Motor Controls.
- High Frequency Isolated DC-DC Converters with Synchronous Rectification for Industrial.
- Load Switching.

Pin Description



Top View of TO-252-2



N-Channel MOSFET

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

Symbol	Parameter	Rating	Unit	
Common Ratings				
V_{DSS}	Drain-Source Voltage	20	V	
V_{GSS}	Gate-Source Voltage	± 12		
T_J	Maximum Junction Temperature	150	$^\circ\text{C}$	
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
I_S	Diode Continuous Forward Current	$T_C=25^\circ\text{C}$	20	A
I_D	Continuous Drain Current	$T_C=25^\circ\text{C}$	50*	A
		$T_C=100^\circ\text{C}$	70	
I_{DM}^a	Pulse Drain Current Tested	$T_C=25^\circ\text{C}$	260	A
P_D	Maximum Power Dissipation	$T_C=25^\circ\text{C}$	50	W
		$T_C=100^\circ\text{C}$	20	
$R_{\theta JC}$	Thermal Resistance-Junction to Case	Steady State	2.5	$^\circ\text{C/W}$
I_D	Continuous Drain Current	$T_A=25^\circ\text{C}$	18	A
		$T_A=70^\circ\text{C}$	15	
P_D	Maximum Power Dissipation	$T_A=25^\circ\text{C}$	2.5	W
		$T_A=70^\circ\text{C}$	1.6	
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	$t \leq 10\text{s}$	20	$^\circ\text{C/W}$
		Steady State	50	
I_{AS}^b	Avalanche Current, Single pulse	$L=0.5\text{mH}$	19	A
E_{AS}^b	Avalanche Energy, Single pulse	$L=0.5\text{mH}$	212	mJ

Note a : *Current is limited by bond wire.

Note b : UIS tested and pulse width are limited by maximum junction temperature 150°C (initial temperature $T_J=25^\circ\text{C}$).

Electrical Characteristics ($T_A = 25^\circ\text{C}$ Unless Otherwise Noted)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V, I_{DS}=250\mu A$	20	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=20V, V_{GS}=0V$ $T_J=85^\circ\text{C}$	-	-	1	μA
			-	-	30	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_{DS}=250\mu A$	0.5	0.75	1	V
I_{GSS}	Gate Leakage Current	$V_{GS}=\pm 12V, V_{DS}=0V$	-	-	± 100	nA
$R_{DS(ON)}^c$	Drain-Source On-state Resistance	$V_{GS}=10V, I_{DS}=50A$ $T_J=125^\circ\text{C}$	-	7	10	m Ω
			-	7.9	-	
			$V_{GS}=4.5V, I_{DS}=50A$	-	9	
		$V_{GS}=2.5V, I_{DS}=40A$	-	12	13.5	
Diode Characteristics						
V_{SD}^c	Diode Forward Voltage	$I_{SD}=10A, V_{GS}=0V$	-	0.7	1.1	V
t_{rr}	Reverse Recovery Time	$I_{DS}=20A, di_{SD}/dt=100A/\mu s$	-	16	-	ns
t_a	Charge Time		-	9.2	-	
t_b	Discharge Time		-	7	-	
Q_{rr}	Reverse Recovery Charge		-	7.5	-	
Dynamic Characteristics ^d						
R_G	Gate Resistance	$V_{GS}=0V, V_{DS}=0V, F=1\text{MHz}$	-	1.5	2.7	Ω
C_{iss}	Input Capacitance	$V_{GS}=0V,$ $V_{DS}=10V,$ Frequency=1.0MHz	-	780	1015	pF
C_{oss}	Output Capacitance		-	170	-	
C_{rss}	Reverse Transfer Capacitance		-	120	-	
$t_{d(ON)}$	Turn-on Delay Time	$V_{DD}=10V, R_L=10\Omega,$ $I_{DS}=1A, V_{GEN}=4.5V,$ $R_G=1\Omega$	-	10.6	-	ns
t_r	Turn-on Rise Time		-	15	-	
$t_{d(OFF)}$	Turn-off Delay Time		-	17.2	-	
t_f	Turn-off Fall Time		-	4	-	
Gate Charge Characteristics ^d						
Q_g	Total Gate Charge	$V_{DS}=10V, V_{GS}=4.5V,$ $I_{DS}=50A$	-	8.9	11.5	nC
Q_g	Total Gate Charge	$V_{DS}=10V, V_{GS}=4.5V,$ $I_{DS}=50A$	-	50	-	
Q_{gth}	Threshold Gate Charge		-	1.25	-	
Q_{gs}	Gate-Source Charge		-	0.52	-	
Q_{gd}	Gate-Drain Charge		-	3.8	-	

 Note c : Pulse test ; pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.


Note d : Guaranteed by design, not subject to production testing.

Typical Operating Characteristics


Power Dissipation

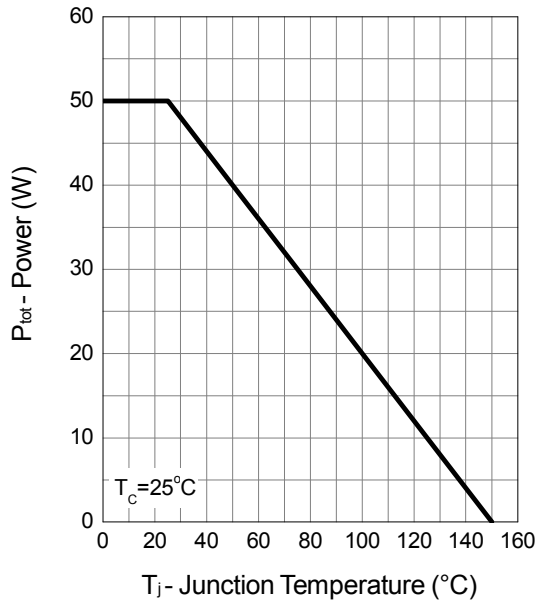


Drain Current

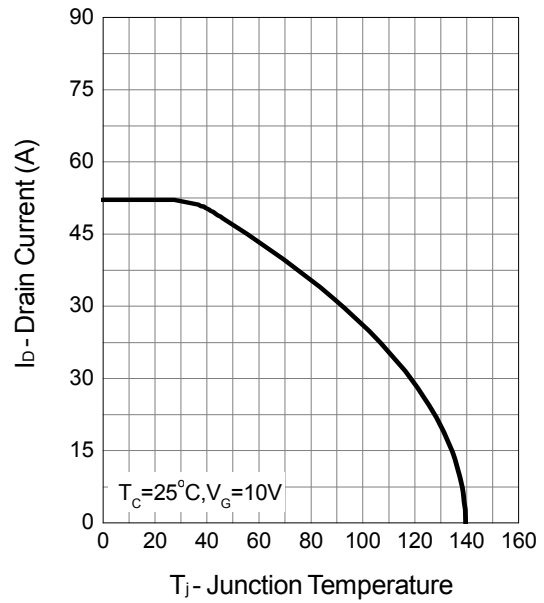

Safe Operation Area

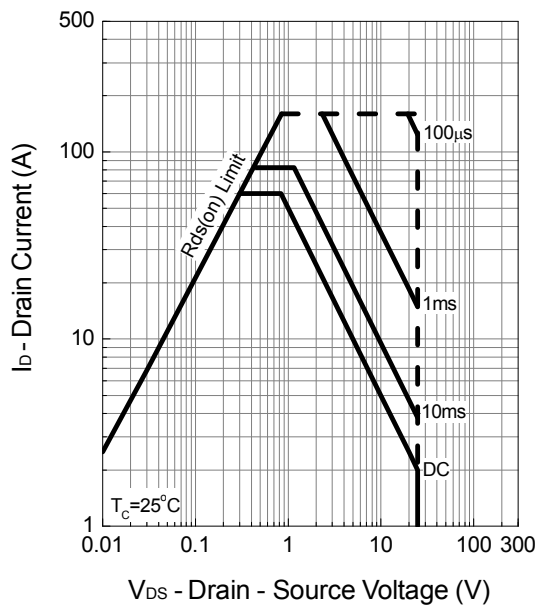


Thermal Transient Impedance

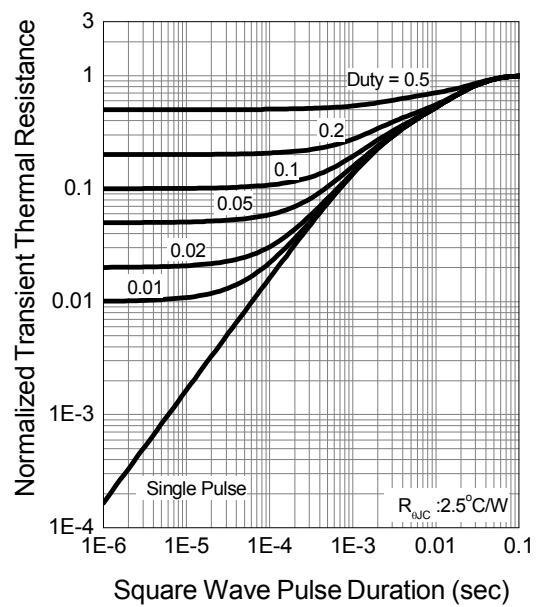


Typical Operating Characteristics (Cont.)


Output Characteristics

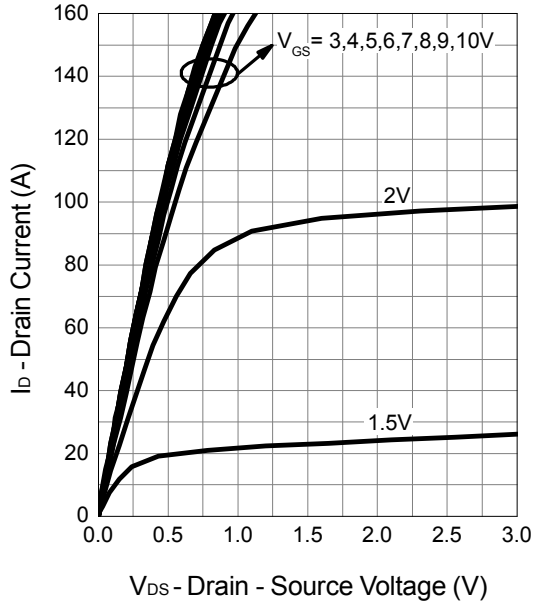


Drain-Source On Resistance

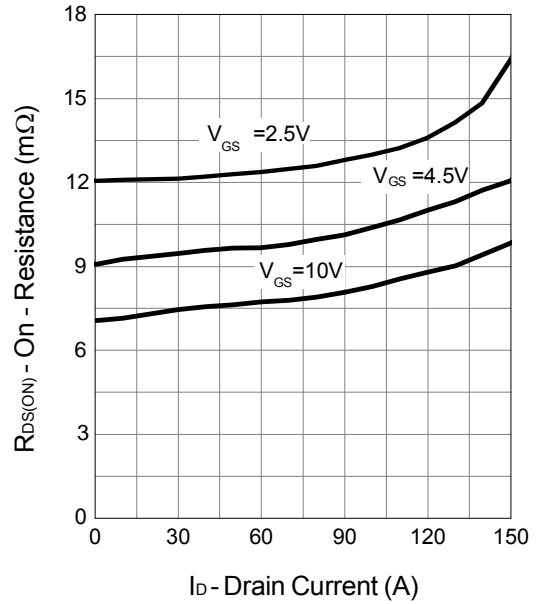

Gate-Source On Resistance

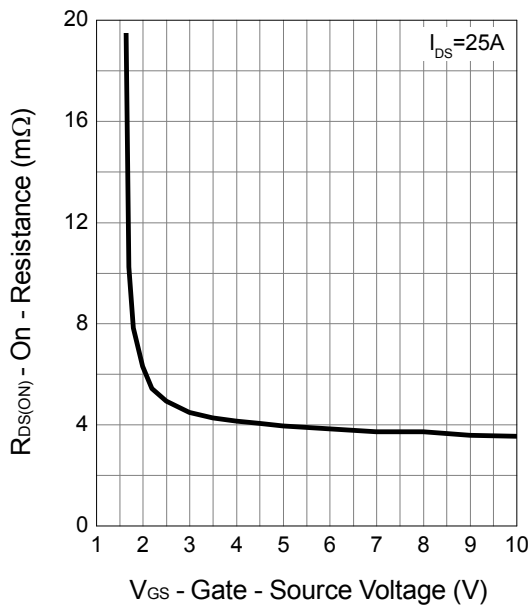


Gate Threshold Voltage

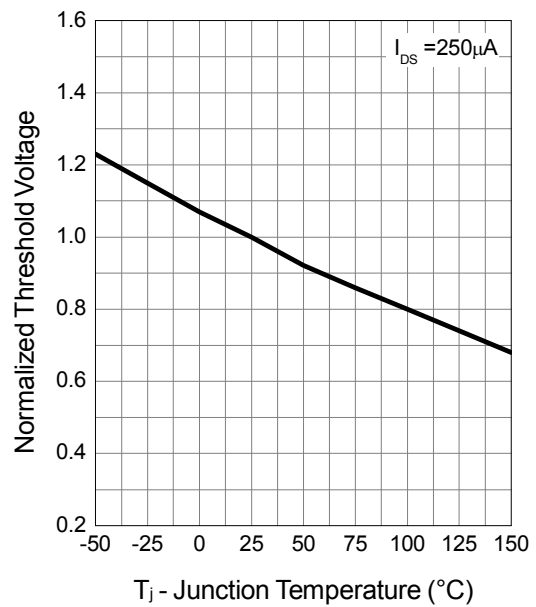


Typical Operating Characteristics (Cont.)


Drain-Source On Resistance

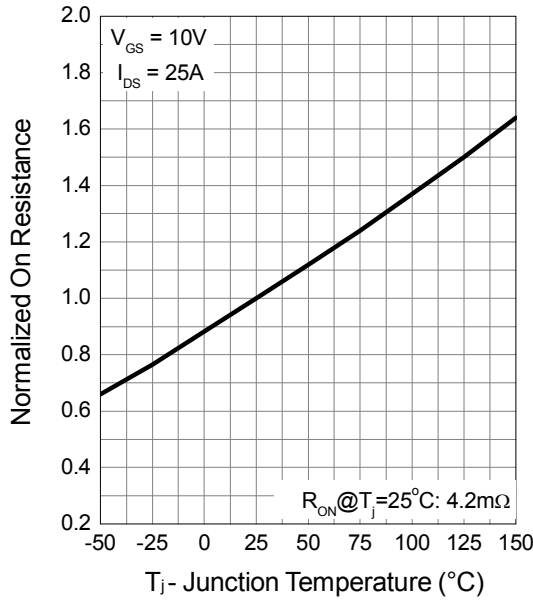


Source-Drain Diode Forward

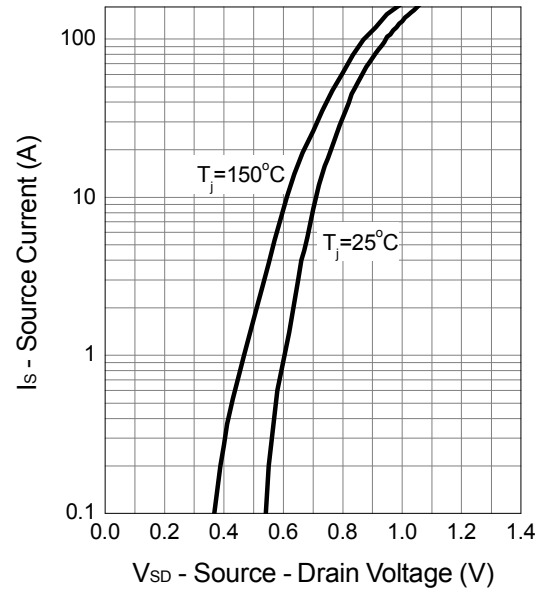



Capacitance

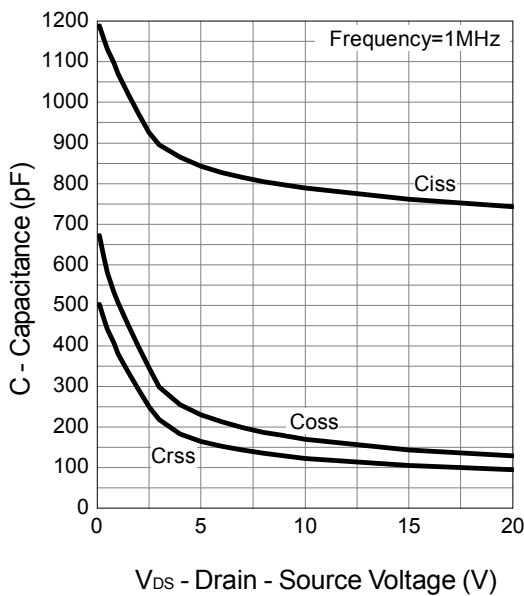



Gate Charge

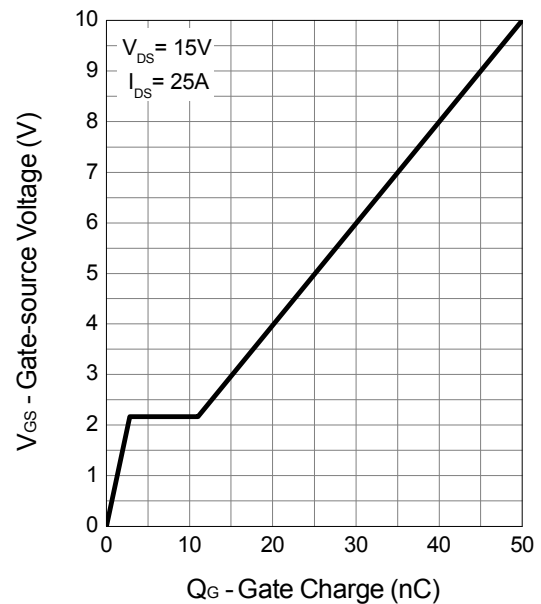


Avalanche Test Circuit and Waveforms

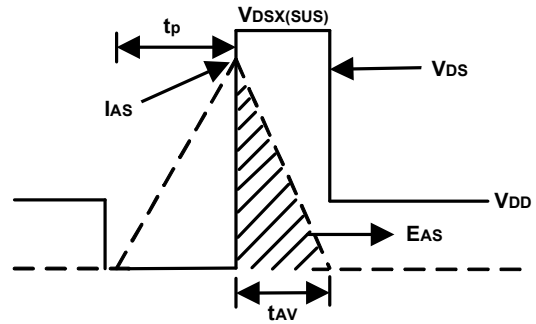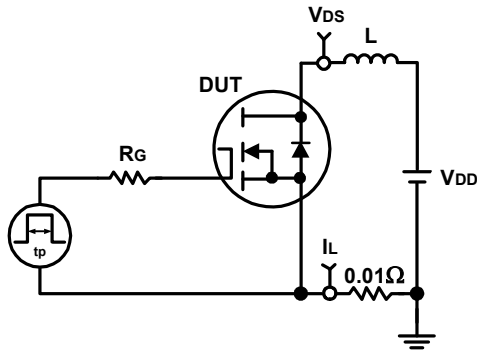

Switching Time Test Circuit and Waveforms

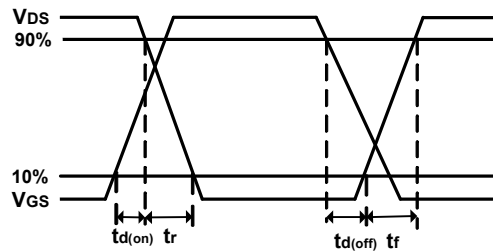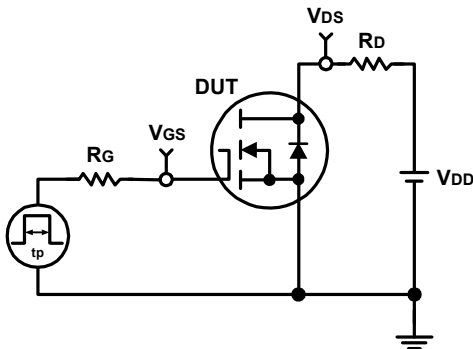


Package Information

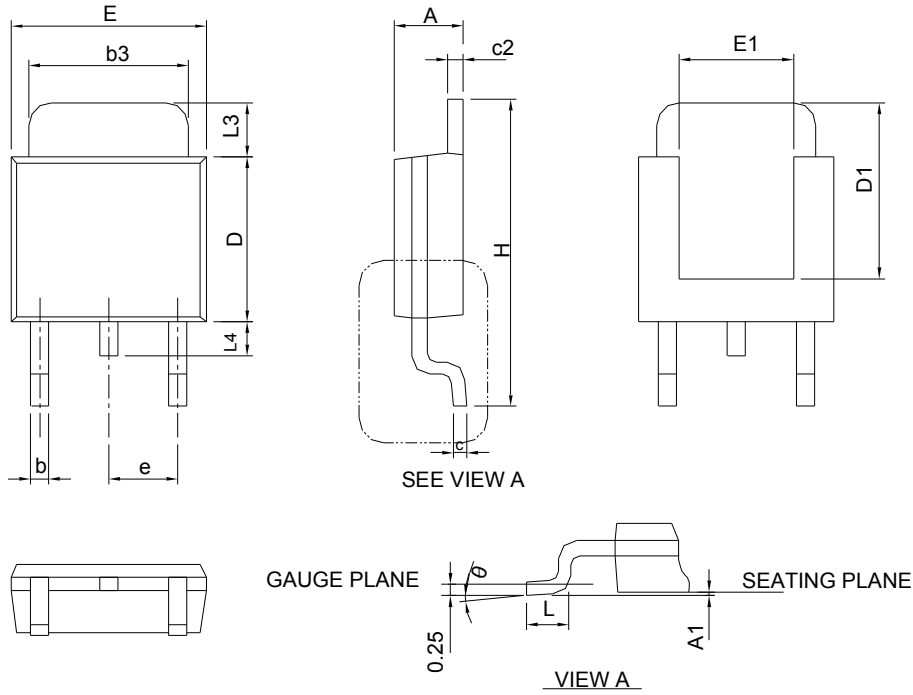TO-252-2


DIMENSIONS	TO-252-2			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	2.18	2.39	0.086	0.094
A1	-	0.13	-	0.005
b	0.50	0.89	0.020	0.035
b3	4.95	5.46	0.195	0.215
c	0.46	0.61	0.018	0.024
c2	0.46	0.89	0.018	0.035
D	5.33	6.22	0.210	0.245
D1	4.57	6.00	0.180	0.236
E	6.35	6.73	0.250	0.265
E1	3.81	6.00	0.150	0.236
e	2.29 BSC		0.090 BSC	
H	9.40	10.41	0.370	0.410
L	0.90	1.78	0.035	0.070
L3	0.89	2.03	0.035	0.080
L4	-	1.02	-	0.040
θ	0°	8°	0°	8°

Note : Follow JEDEC TO-252 .

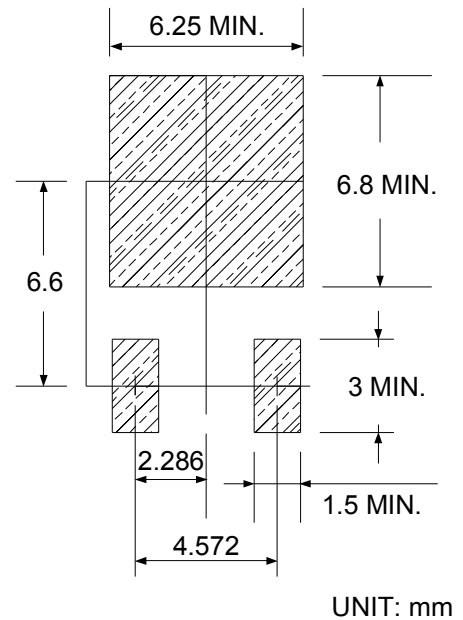RECOMMENDED LAND PATTERN


UNIT: mm